

Part Number PRX+5200 Series Contact Form B Switch Configuration SPST Rev. G

Form B Lug-Type Proximity Sensor


Features	Advantages
<ul style="list-style-type: none"> Hermetically sealed contacts Housing color eggshell Housing color brown, PRX+52012 Housing color gray, PRX+5203 Lead glass currently exempt from RoHS requirements 	<ul style="list-style-type: none"> Custom sensitivity and configurations available Not ESD sensitive UL Listed

Electrical Specifications

Power		Watts - maximum	3
Voltage	Switching	VDC - maximum	120
	Breakdown	VDC - minimum	400
Current	Switching	Amp - maximum	0.25
	Carry	Amp - maximum	2.6
Resistance	Initial Contact Resistance	Ohm - maximum	0.25
	Insulation Resistance	Ohm - minimum	1 E9
Capacitance	Contact	pF - typical	1.7
Temperature	Operating	°C - maximum	-40 to +80
	Storage	°C	-40 to +80

Physical/Operational Specifications

Housing Volume	Excluding Connection	CC - nominal	13.6
External Connection		Lug Terminal	Tin
Must Operate	Distance (d)	Inches minimum	1.000
Must Release	Distance (d)	Inches maximum	2.500
Operate Time	Including Bounce	mSeconds - maximum	1
Release Time		mSeconds - maximum	0.8

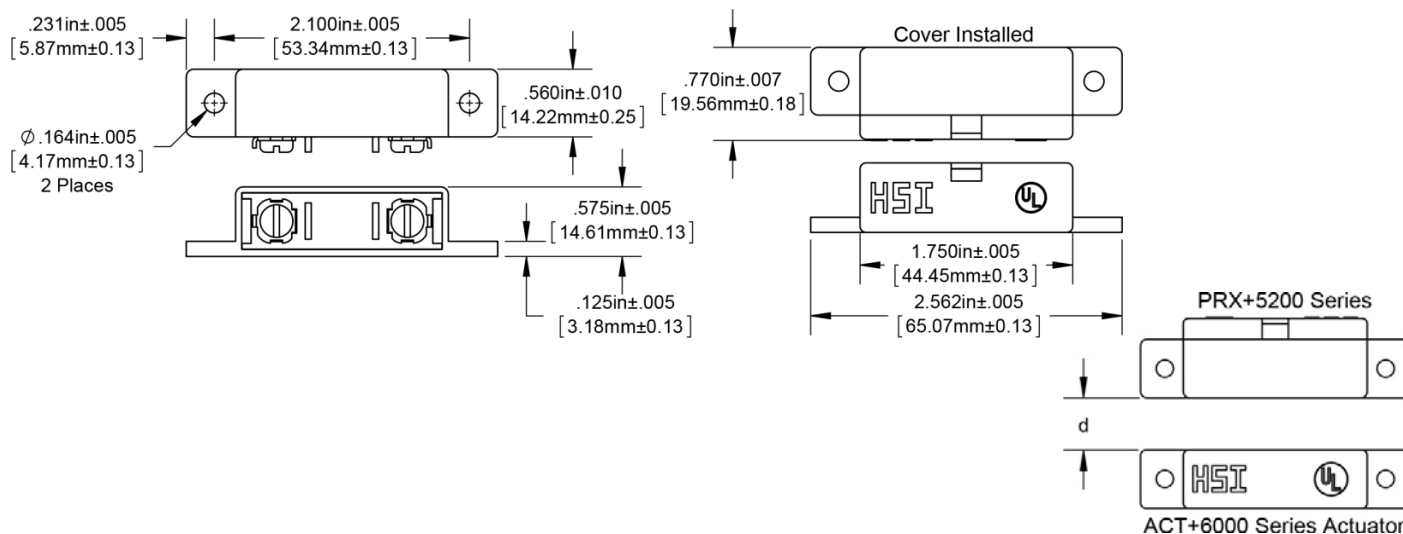

Notes:

- Specifications are not constant across entire magnetic range.
- Customer must exercise care in handling and mounting to prevent damage to internal components and subsequent changes to sensor performance.
- For information about performance, custom configuration (i.e. wire length of color; connectors; operational variation), or packaging contact our Sales Department.
- Information contained hereon is for informational purposes only and should not be deemed as accurate use for a specific application. Consult factory for specific application information and/or latest revision.