

Item Number PRX+7300 Series Contact Form B Switch Configuration SPST Rev. H

Form B Low-Profile Proximity Sensor


Features	Advantages
<ul style="list-style-type: none"> Hermetically sealed Rhodium contacts Materials are Lead free and RoHS compliant Low profile housing SPST Normally Closed Contact (Form B) 	<ul style="list-style-type: none"> Custom sensitivity and configurations available Epoxy sealed construction Not ESD sensitive UL94 flame rated black ABS housing

Electrical Specifications

Power		Watts - maximum	3
Voltage	Switching	VDC - maximum	30
	Breakdown	VDC - minimum	200
Current	Switching	Amp - maximum	0.1
	Carry	Amp - maximum	1.0
Resistance	Initial Contact Resistance	Ohm - maximum	0.50
	Insulation Resistance	Ohm - minimum	1 E9
Capacitance	Contact	pF - typical	1.1
Temperature	Operating	°C - maximum	+75
	Storage	°C	-40 to +105

Physical/Operational Specifications

Housing Volume	Excluding Connection	CC - nominal	1.2
External Connection	24 AWG	Zip Cord	PVC
Must Operate	Distance (d)	Inches	0.500
Must Release	Distance (d)	Inches	1.000
Operate Time	Including Bounce	mSeconds - maximum	0.60
Release Time		mSeconds - maximum	0.60

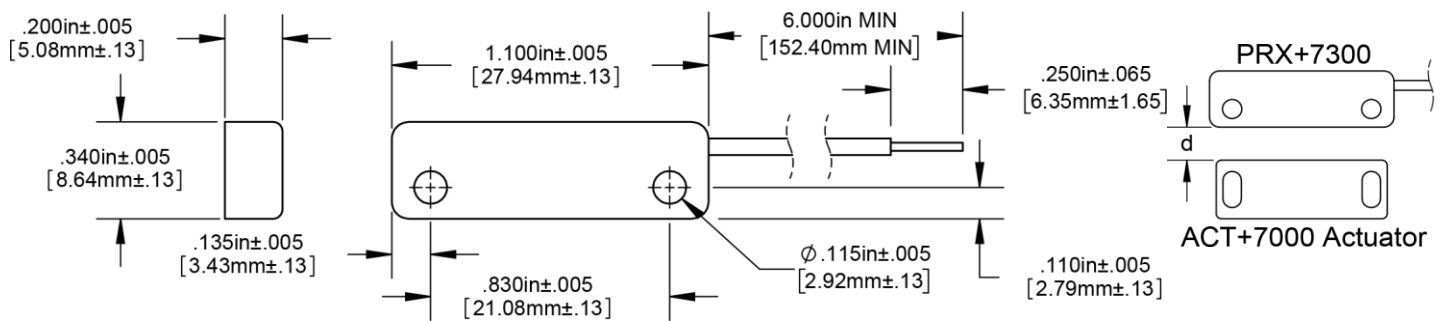

Notes:

- (1) Customer must exercise care in handling and mounting to prevent damage to internal components and subsequent changes to sensor performance.
- (2) For information about performance, mounting options, custom configurations (e.g. wire length or color, connectors, operational variation) or packaging contact our Sales department.
- (3) Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.