

Item Number PRX+8365 Series Contact Form C Switch Configuration SPDT Rev. B

Extreme Temperature Proximity Sensor


Features	Advantages
<ul style="list-style-type: none"> Engineered for use at extreme temperatures Hermetically sealed Rhodium contacts Materials are Lead free and RoHS compliant Low profile housing 	<ul style="list-style-type: none"> Extended operations in extreme environments Custom sensitivity and configurations available UL94 flame rated black Valox housing Cable flame rating: NFPA 262/FT6

Electrical Specifications

Power		Watts - maximum	3
Voltage	Switching	VDC - maximum	120
	Breakdown	VDC - minimum	400
Current	Switching	Amp - maximum	0.25
	Carry	Amp - maximum	2.6
Resistance	Initial Contact Resistance	Ohm - maximum	0.50
	Insulation Resistance	Ohm - minimum	1 E9
Capacitance	Contact	pF - typical	1.7
Temperature	Operating	°C - maximum	-60 to 200
	Storage	°C	-60 to 200

Physical/Operational Specifications

Housing Volume	Excluding Connection	CC - nominal	3.43
External Connection	22 AWG	CL2P/CMP	FEP
Must Operate	Distance (d)	Inches	0.500
Must Release	Distance (d)	Inches	1.000
Operate Time	Including Bounce	mSeconds - maximum	1.00
Release Time		mSeconds - maximum	0.80

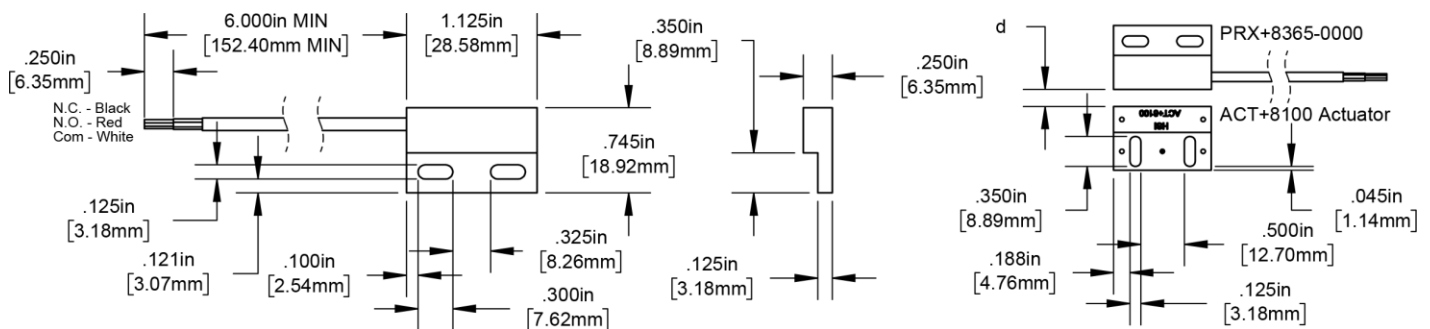

Notes:

- (1) Customer must exercise care in handling and mounting to prevent damage to internal components and subsequent changes to sensor performance.
- (2) For information about performance, mounting options, custom configurations (e.g. wire length or color, connectors, operational variation) or packaging contact our Sales department.
- (3) Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.