

Item Number PRX+1700 Series Contact Form A Switch Configuration SPST Rev. J

Form A Cylindrical Proximity Sensor


Features	Advantages
<ul style="list-style-type: none"> Hermetically sealed Rhodium contacts Materials are Lead free and RoHS compliant Designed for 1/4" diameter hole UL94 flame rated black Valox housing 	<ul style="list-style-type: none"> Extended operations in extreme environments Not ESD sensitive Custom sensitivity and configurations available

Electrical Specifications

Power		Watts - maximum	10
Voltage	Switching	VDC - maximum	100
	Breakdown	VDC - minimum	300
Current	Switching	Amp - maximum	0.25
	Carry	Amp - maximum	1.5
Resistance	Initial Contact Resistance	Ohm - maximum	0.25
	Insulation Resistance	Ohm - minimum	1 E11
Capacitance	Contact	pF - typical	0.6
Temperature	Operating	°C - maximum	+105
	Storage	°C	-40 to +140

Physical/Operational Specifications

Housing Volume	Excluding Connection	CC - nominal	0.77
External Connection	22 AWG	UL 1007/1569	PVC
Must Operate	Distance (d)	Inches	0.200
Must Release	Distance (d)	Inches	0.550
Operate Time	Including Bounce	mSeconds-maximum	1.00
Release Time		mSeconds-maximum	0.30

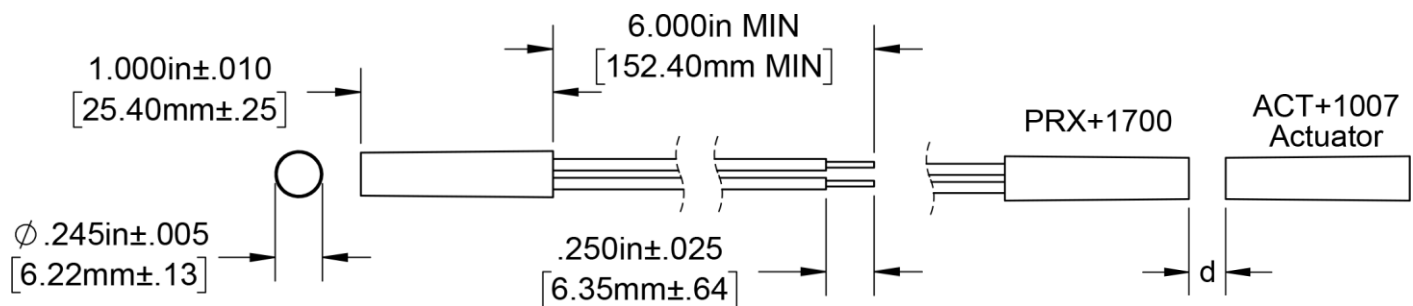

Notes:

- Customer must exercise care in handling and mounting to prevent damage to internal components and subsequent changes to sensor performance.
- For information about performance, mounting options, custom configurations (e.g. wire length or color, connectors, operational variation) or packaging contact our Sales department.
- Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.